


## **Residential Dumbwaiter**

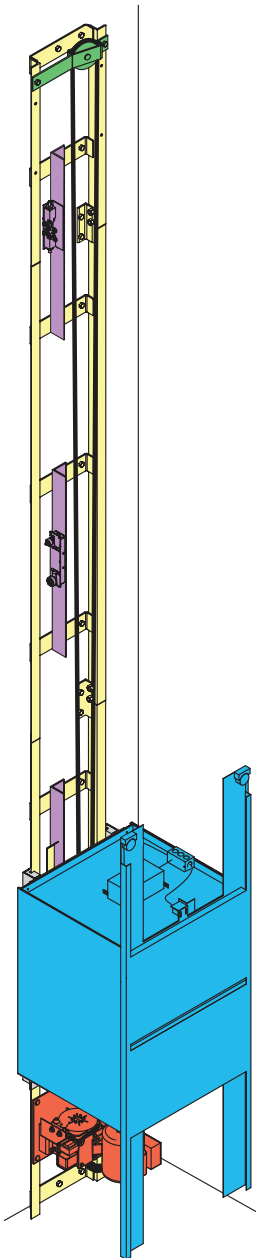

**Capacity** - 100 lbs.

**Travel** - Up to 50 ft.

**Stops** - Up to 6 stops

**Nominal Speed** - 30 feet per minute

**Overhead** - 8" minimum, 1'-6" recommended above top of car (additional overhead required for car gates or overhead machine configurations)

**Loading Height** - 30" minimum when machine is "rail mounted" below car (overhead or remote machine location and/or pit, required for loading heights below 30")

**Guide Rails** - Heavy gauge steel angles.

**Electric Supply** - 115 volts, 15 amp single phase.

**Powerhead** - Single speed winding drum with 3/4 HP motor

**Brake** - Electrically released and spring applied

**Controls** - Momentary contact call/send push buttons at each landing.

**Safeties** - Single instantaneous broken cable, applied by a retained compression spring

**Cable** - One, 1/8" diameter steel cable

**Hoistway Door Interlocks** - Required at each landing

**Emergency Lowering** - Manual hand crank

**Car** - Powdercoated steel (standard) Stainless Steel (optional)

**Car Gate Options** - Roll Top (standard), Bi-Parting (optional)

**Additional Options** - are available, for details contact your local dealer

Products and illustrations shown may not be standard. Specifications describe equipment, which is either standard or optional. Stated ratings are based on standard equipment. Specifications and design are subject to change without notice.